

FRONTIER™

# FRONTIER™ PRO REPLACEMENT FILTER



## USER MANUAL


Model Number 67013

EPA Est. No 71766-UT-001

## FOR USE WITH:

# FRONTIER™ PRO

ULTRALIGHT WATER FILTER

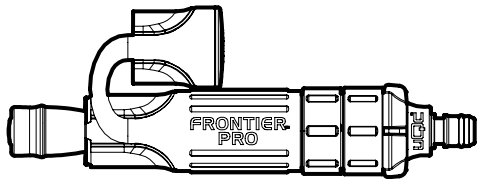

PART #

ITEM NAME

67006, 67106

Frontier™ Pro Water Filter

## MAINTENANCE AND STORAGE

### Filter Storage

- Remove and discard the pre-filter disk.
- Remove the filter cartridge, and allow filter to air dry at room temperature for at least 48 hours prior to storing.
- Once dry, store in a cool dry location. Do not store used filter in a sealed container.
- Do not freeze filter or expose filter to extreme temperatures.
- Insert a new pre-filter disk prior to next use.

**Note: DO NOT FREEZE.** Freezing a wetted filter may damage the filter media and compromise filter integrity.

# FRONTIER™ PRO REPLACEMENT FILTER

## INTRODUCTION

Thank you for purchasing the Frontier Pro Series III Replacement Filter. The GRN Line bacteria-grade filter offers a light-weight, high flow, robust defense against Cysts and Bacteria, the most common causes waterborne illnesses.

## FEATURES

- Connects easily to the Frontier Pro using standard 28mm threads.
- Designed for high flow, minimal waste and light weight.
- Miraguard™ Antimicrobial\* Technology


## CAUTIONARY STATEMENTS

- CAUTION - To avoid cross contamination: Do not handle filter with wet hands that been exposed to contaminated water. Do not submerge filter or mouthpiece in contaminated water.
- CAUTION - Do not freeze filter or expose filter to extreme temperatures

## PRODUCT INSTRUCTIONS

### TO REMOVE OR REPLACE PRIMARY FILTER

The Frontier GRN Line Series III filter is rated to filter at least 50 gallons of water. Replace filter when flow rate slows down or when unpleasant taste and odor is noticeable.

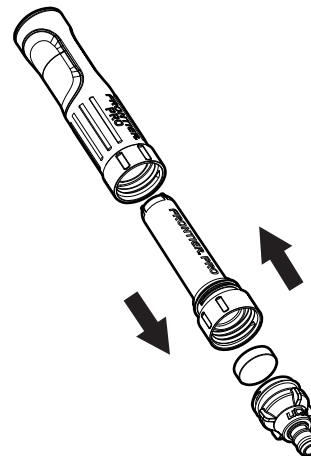

#### STEP 1

If UQC pre-filter adapter is attached to filter casing, unscrew and remove.

#### STEP 2

Unscrew the used filter cartridge and remove from the casing.

#### STEP 3

Screw the replacement filter into the casing and tighten by hand.

#### STEP 4

Insert new pre-filter disk into the UQC pre-filter adapter and screw snugly into the base of the filter casing.

**CAUTION** – To avoid cross contamination: Do not handle filter with wet hands that been exposed to contaminated water.

# TECHNICAL INFORMATION

## FILTER CARTRIDGES

PARAMETER	GRN Line Series III Filter
Service Life	50 Gal. (189 L)
Flow Rate	up to 500 ml/min
Operating Temperatures	35–120° F (1.6–49° C)
Operating Pressures	0–3 psi (0–0.211 kg f/cm <sup>2</sup> )
Use Conditions	Use best water source available, quality of the source water may vary, use only Aquamira GRN Line Series III filters. We recommend pretreating water with Aquamira® Water Treatment Drops (#67202) if biological/viral quality of source water is uncertain.

\*Sold separately

### Removal

GRN LINE		BACTERIA PROTECTION
Bacteria Removal	≥99.9999%	
Cyst Removal	≥99.95%	
MEETS US EPA BIOLOGICAL PURIFIER TEST STANDARD FOR REDUCTION OF BACTERIA & CYSTS		
Chlorine, Chemical, Taste & Odor Removal		
MEETS OR EXCEEDS ANSI/NSF 42		

## LIMITED WARRANTY AND DISCLAIMER

Aquamira warrants all products to be free from defects in workmanship and materials for one year from the date of purchase by the consumer, or for the duration of the imprinted shelf life. Filter clogging or normal wear is not a defect. If you are not satisfied with the performance of an Aquamira product, Aquamira will repair or replace the product.

Aquamira Technologies, Inc. (Aquamira) hereby excludes any expressed or implied warranties of fitness for a particular purpose. The following is made in lieu of any such warranties: The information and specifications supplied by Aquamira are based on industry standards and are tested using standard laboratory test conditions which are accepted in the industry to be reliable. Aquamira does not guarantee that any result shown or claimed will be obtained. Before using any Aquamira product, the user shall determine the suitability and the fitness of the products for their intended use. The effectiveness of Aquamira products may be limited by environmental or hygienic conditions, such as use with contaminated hands, recontamination after filtration or treatment, failure to maintain a sterile mouthpiece or downstream equipment, sharing with multiple users, exposure to extreme environmental conditions such as heat, freezing, severe shock such as drops or other impact that may damage the integrity of filters, seals or connections. The user assumes all risk and liability in connection with its own tests and use. Aquamira shall not be liable for any injury, loss or damage, direct or consequential, resulting by or from the use, misuse, or inability to use Aquamira products.

## CERTIFICATIONS AND PATENTS



Certified by IAPMO R&T to NSF/ANSI 372 for lead free content. Meets US EPA Microbiological Purifier test standard for the reduction of cysts and bacteria.

**aquamira.**

917 West 600 North, Logan, UT 84321

ph: (877) 644-4650

www.aquamira.com

© Copyright 2016 Aquamira Technologies, Inc.

015414

**aquamira.**